


# Sunny Apex

## 70W Solar Module

## High Efficiency Back-Contact

- ☉ Sunny Apex's HOP series solar modules ranged from 35Watt to 155Watt
- Aesthetically using clear surface back-contact cells
- ☉ Cells with High conversion efficiency above 23%
- Anodized aluminum improving corrosion resistance
- ☉ Excellent performance under low light conditions

✦ **Your best choice for off-grid solar application !** ✦

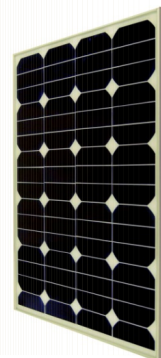

### Electrical Specifications

Model Type	SA-H70	SA-H65
Peak Power (Pmax)	70W	65W
Module Efficiency	17.80%	16.50%
Maximum Power Voltage (Vmp)	17.5V	17.5V
Maximum Power Current (Imp)	4.0A	3.72A
Open Circuit Voltage (Voc)	21.3V	21.3V
Short Circuit Current (Isc)	4.4A	4.05A
Power Tolerance	-5% / + 10%	
Maximum System Voltage	70V	
Norminal Operating Cell Temp.	46 °C (+/- 2)	

### Mechanical Specifications


Cell type	Back contact high eff. Mono
Number of cells	Total 64 cells, 32 cells in series
Weight	4.97kg [10.96lbs]
Dimensions	734 x 535 x 35mm [28.92 x 21.08 x 1.38in]
Frame	> 15µm clear anodized aluminum
Junction Box	IP 65 waterproof
Cables	4.00mm <sup>2</sup> , 900mm
Connectors	MC4 compatible

### Temperature Coefficients

Power	-0.32%/ °C
Voltage	-1.8mV/ °C

### Warranties & Certifications

Warranties	2 years product warranty, 20 years limited power warranty of 80% of the minimum specified power rating
Certificates	CE

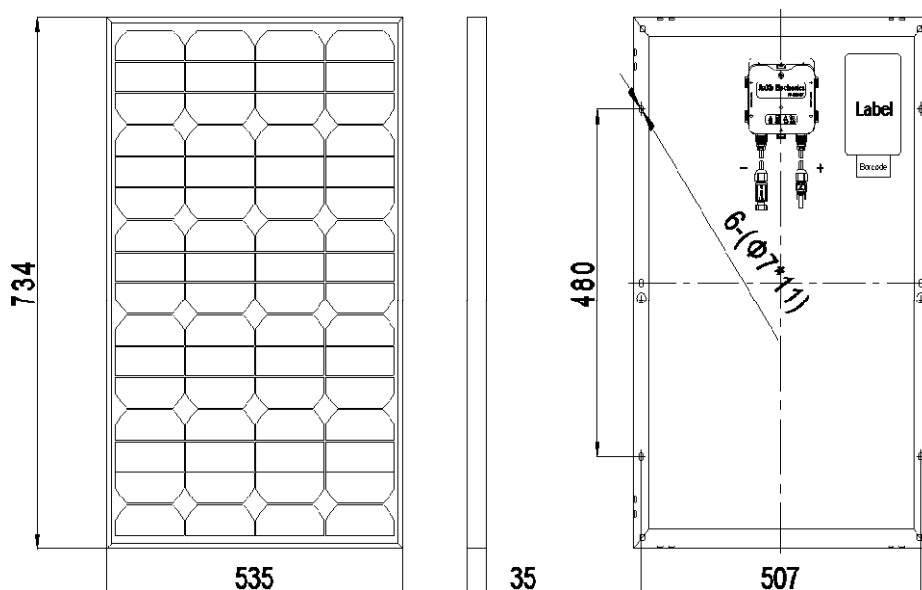

Unit: mm [inch]

Note: All electrical parameters are rated at standard test conditions (irradiance of 1000W/m<sup>2</sup>, AM 1.5G, cell temperature 77°F/25°C)

Caution: Read Safety and Installation Instruction before using this product.

2017 Sunny Apex Development Ltd. All right reserved. Specifications included in this datasheet are subject to change without notice.