


Sunny Apex

155W Solar Module

High Efficiency Back-Contact

- ☉ Sunny Apex's HOP series solar modules ranged from 35Watt to 155Watt
- Aesthetically using clear surface back-contact cells
- ☉ Cells with High conversion efficiency above 23%
- Anodized aluminum improving corrosion resistance
- ☉ Excellent performance under low light conditions

*** Your best choice for off-grid solar application ! ***

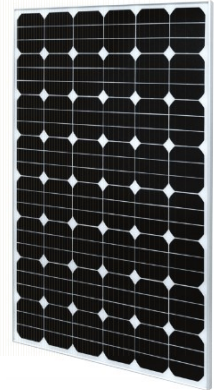

Electrical Specifications

Model Type	SA-H155	SA-H155
Peak Power (Pmax)	155W	155W
Module Efficiency	18.00%	18.00%
Maximum Power Voltage (Vmp)	19.8V	39.6V
Maximum Power Current (Imp)	7.8A	3.9A
Open Circuit Voltage (Voc)	24.1V	48.2V
Short Circuit Current (Isc)	8.6A	4.3A
Power Tolerance	-5% / + 10%	
Maximum System Voltage	70V	
Normal Operating Cell Temp.	46 °C (+/- 2)	

Mechanical Specifications



Cell type	Back contact high eff. Mono
Number of cells	Total 144 cells, 36 cells in series
Weight	10.77kg [23.74lbs]
Dimensions	1082 x 796 x 35mm [42.55 x 31.36 x 1.38in]
Frame	> 15 μ m clear anodized aluminum
Junction Box	IP 65 waterproof
Cables	4.00mm ² , 900mm
Connectors	MC4 compatible

Temperature Coefficients

Power	-0.32%/ °C
Voltage	-1.8mV/ °C

Warranties & Certifications

Warranties	2 years product warranty, 20 years limited power warranty of 80% of the minimum specified power rating
Certificates	CE

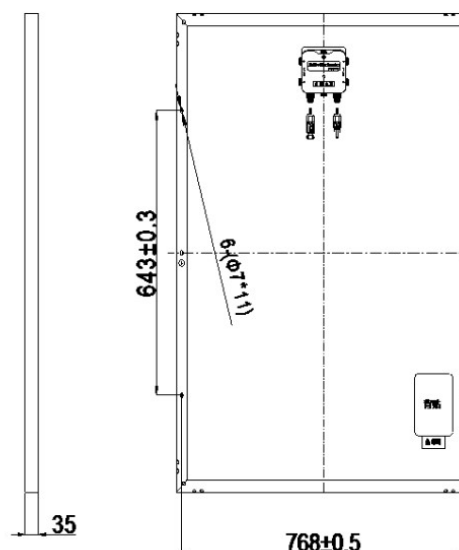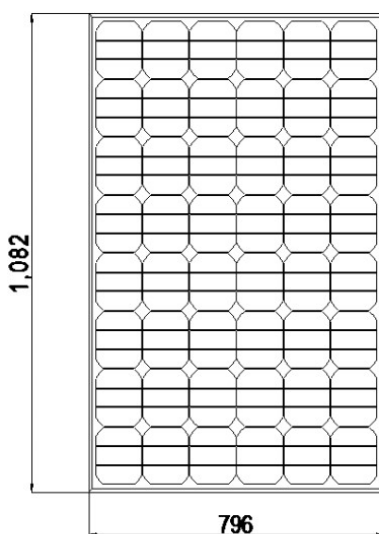

Unit: mm [inch]

Note: All electrical parameters are rated at standard test conditions (irradiance of 1000W/m², AM 1.5G, cell temperature 77°F/25°C)

Caution: Read Safety and Installation Instruction before using this product.

2017 Sunny Apex Development Ltd. All right reserved. Specifications included in this datasheet are subject to change without notice.