


# Sunny Apex

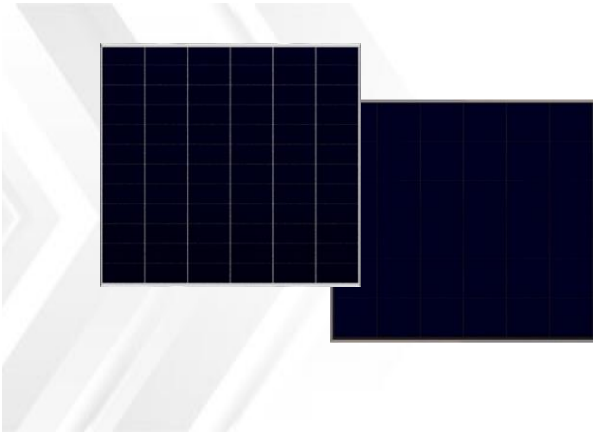

## Features

- Aesthetically using clear surface back-contact cells
- Cells with High conversion efficiency above 24%
- N-type solar cell has no LID naturally
- Lower hot spot temperature, higher safety
- Lower shadow-blocking loss
- Better weak illumination response

## Electrical Specifications

Model Type	SA-B185
Peak Power (Pmax)	185W
Module Efficiency	22.08%
Maximum Power Voltage (Vmp)	21.5V
Maximum Power Current (Imp)	8.61A
Open Circuit Voltage (Voc)	24.5V
Short Circuit Current (Isc)	9.09A
Power Tolerance	-5% / + 10%
Maximum System Voltage	600V
Normal Operating Cell Temp.	46 °C (+/- 2)

## Mechanical Specifications


Cell type	IBC
Number of cells	total 68 cells, 34 cells in series
Weight	8.5kg [18.74lbs]
Dimensions	1095 x 765 x 35mm [43.11 x 30.12 x 1.38in]
Frame	> 15 $\mu$ m clear anodized aluminum
Junction Box	IP 65 waterproof
Cables	4.00mm <sup>2</sup> , 900mm
Connectors	MC4 compatible

## Temperature Coefficients

Power	-0.290%/°C
Voltage	- 0.230%/°C
Current	+0.050%/°C

## Warranties & Certifications

Warranties	2 years product warranty, 25 years limited power warranty of 80% of the minimum specified power rating
------------	--

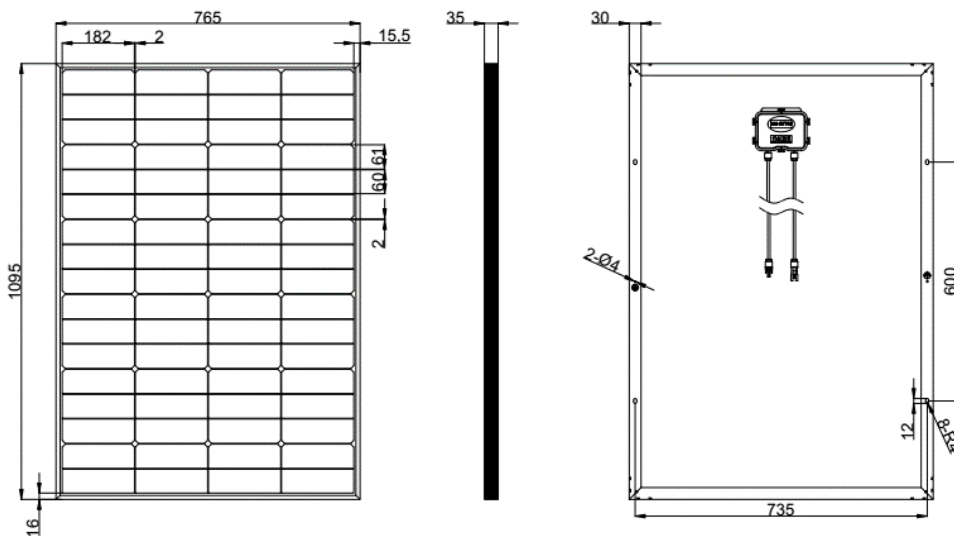

Unit: mm [inch]

Note: All electrical parameters are rated at standard test conditions (irradiance of 1000W/m<sup>2</sup>, AM 1.5G, cell temperature 77°F/25°C)

Caution: Read Safety and Installation Instruction before using this product.

2024 Sunny Apex Development Ltd. All right reserved. Specifications included in this datasheet are subject to change without notice.